


NO. J4-31955-1

## PUMP PERFORMANCE CURVES

TYPE **SUBMERSIBLE PUMP**      MODEL **NK2-22L**      FREQUENCY **60 Hz**

CUSTOMER'S NAME: \_\_\_\_\_  
 EQUIPMENT TITLE: \_\_\_\_\_      DATE: \_\_\_\_\_

	STANDARD SPECIFICATIONS	REQUIRED SPECIFICATIONS
DISCHARGE BORE	NOMINAL INCH	NOMINAL 3 INCH
TOTAL HEAD	FEET	MAX. 64 (19.5M) FEET
CAPACITY	GL/MIN	MAX. 198 (0.75M <sup>3</sup> /MIN) GL/MIN
MOTOR OUTPUT	HP	3 (2.2KW) HP
PHASE × VOLTAGE	φ × V	1 φ × 230 V
RATED CURRENT	A	1131 A
POLES / REVOLUTION	P / S.S. MIN <sup>-1</sup>	2 P / S.S. 3600 MIN <sup>-1</sup>
STARTING METHOD		CAPACITOR MOTOR
INSULATION CLASS		B

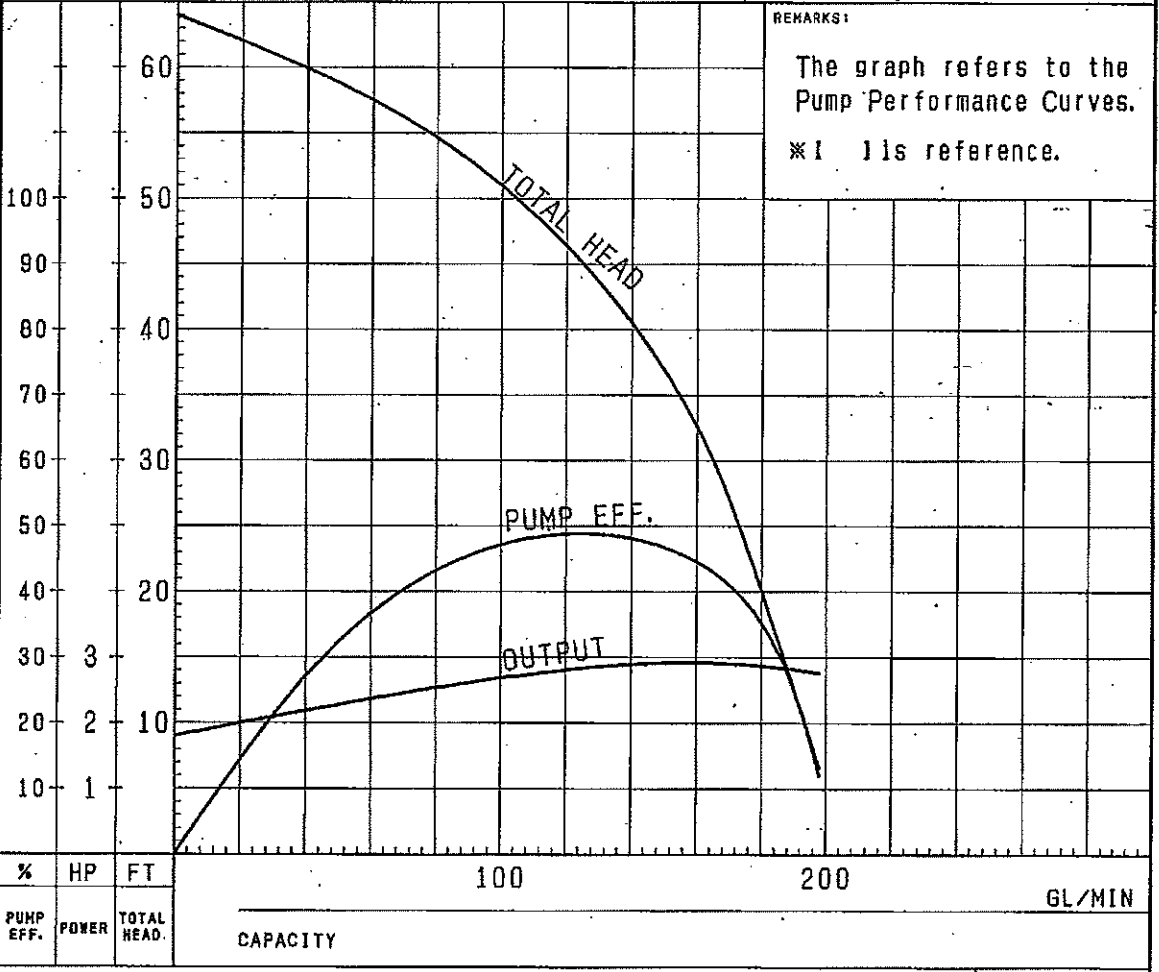

TSURUMI MANUFACTURING CO., LTD.

CHECKED BY \_\_\_\_\_